

PowerWalker VFI 10000TCP 3/1

Online UPS

10000VA Online UPS with 0.9 Output Power Factor

3 phase in / 1 phase out

(also configurable as 1 phase in / 1 phase out)


Terminal Outlet + 2x IEC C13, EPO, 2x Intelligent Slot

USB & RS-232 Connection for monitoring

Optional: SNMP module, AS/400 card, Modbus card,
Battery Pack, External Charger, Parallel port



Item-No. 10120161

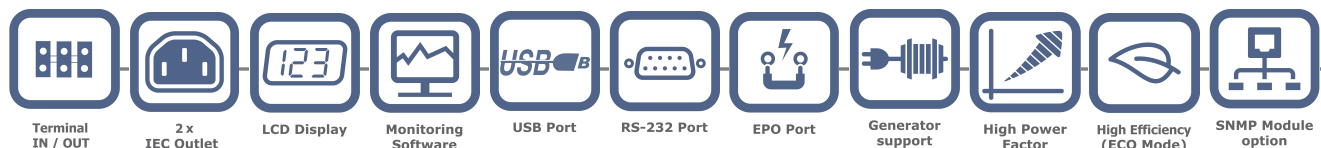


Product Features

With its true double-conversion online UPS design, PowerWalker VFI 10000TCP 3/1 provides powerful and overall protection to your sensitive devices. With its 3 phase in and 1 phase out it can balance the power consumption from all incoming lines and creates a stable power output for equipment with even high power consumption. Multiple communication ports allows to integrate the UPS in existing structures.

- True double-conversion with pure sine wave output
- Output power factor 0.9
- Monitoring software included
- Wide input voltage range (110-276 VAC 1Φ in/ 190-478VAC 3Φ in)
- Input power factor correction
- Input THDi <5%, Output THDv <2%
- 50/60 Hz frequency converter mode
- ECO mode operation for energy saving
- Emergency power off (EPO) function
- Intelligent fan control for reduced noise level
- N+X Parallel Redundancy for up to 4 UPS of same size
- Integrated maintenance bypass switch
- Optional: SNMP module, Dry Contact AS/400 card, Parallel Port, External Battery Pack, External Battery Charger, Modbus card



LCD Display

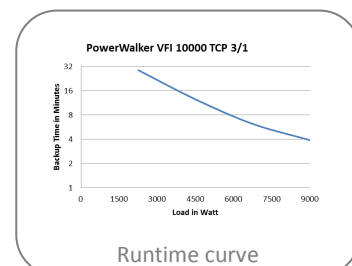

Runtime curve

PowerWalker is a brand of:

BlueWalker GmbH

Martin-Buber-Strasse 12 • D-41470 Neuss • Germany

Phone: +49 (0) 2137 / 92 98 73 • Fax: +49 (0) 2137 / 78 73 925

info@bluewalker.eu • www.bluewalker.eu • www.powerwalker.com

Technical Details

Product Features

Capacity	10000VA/9000W
Input	
Voltage	230V / 400V
Voltage Range single phase	110-276VAC single phase with ground (L-N-G)
Transfer Voltage Range	Based on Load percentage 100%/50%
Line low loss	176VAC/110VAC (±3%)
Line low comeback	186VAC/120VAC (±3%)
Line high loss	276VAC (±3%)
Line high comeback	266VAC (±3%)
Voltage Range three phase	190-478VAC three phase with ground (R-S-T-N-G)
Transfer Voltage Range	Based on Load percentage 100%/50%
Line low loss	305VAC/190VAC (±3%)
Line low comeback	322VAC/208VAC (±3%)
Line high loss	478VAC (±3%)
Line high comeback	461VAC (±3%)
THDi	<5% with full load
Frequency Range	45-55Hz/54-66Hz
Power Factor	≥ 0.99 at Full Load
Generator Set	1.8 x UPS Rating Power
Output	
Voltage	208/220/230/240 ± 1%
Frequency (Synchronized Range)	45-55Hz/54-66Hz
Frequency (Battery Mode)	50/60Hz ± 0.05%
Current Crest Ratio	3:1
Harmonic Distortion	≤ 2% (Full Linear Load)
Waveform	Pure Sine Wave
Overload Capability	5 min at 100-110%
	1 min at 110-130%
	10 sec at 130-150%
	2 sec at >150%
Parallel configuration	Up to 4 UPS of same size (optional parallel port required)
Transfer Time	
AC to DC	Zero
Inverter to Bypass	Zero
Inverter to ECO	Zero
ECO to Inverter	<10ms

Battery

Type	12V / 9Ah
Quantity	20x
Backup Time (full load)	5 Minutes (0.7 power factor load)
Recharge Time	8h to 90%

Bypass

Before UPS Power-on	Default "No" Change to "Yes" via display panel
Overload und UPS Failure	Automatically transfer to bypass
By Setting	Voltage Rang: 176-276V ± 3%

LCD Display

LCD Indicators	UPS status, Load level, Battery level, Input/Output voltage, AC mode, Battery mode, Bypass mode, Fault conditions
-----------------------	----------------------------------------------------------------------------------------------------------------------------

Audio Indicators

4 Modes	See manual for details
----------------	------------------------

Connections

Communication	USB & RS232
Outlets	2x IEC C13, Terminal outlet
Intelligent Slot	Yes
AS-400 Slot	Yes
EPO	Yes
Maintenance Switch	Yes

Software & System Requirements

Software	Winpower
Operating System	For details visit: http://www.powerwalker.com/winpower.html

Product Details

Dimensions	550 x 260 x 708 mm
Colour	Black
Weight	85 kg
Fan Control	Always on, automatic speed control
Noise Level	< 55dB at front 1 Meter
Model Code	VFI 10000TCP 3/1

Environment

Temperature	0°C – 40°C
Humidity	0 - 95% (non-condensing)

Package Content

Package Content	PowerWalker VFI 10000TCP 3/1, manual, USB cable, Software CD,
------------------------	------------------------------------------------------------------

Optional Accessories

SNMP/NMC Module	Item-No.: 10120517
Parallel Communication Kit	Item-No.: 10120563
Battery Pack	Item-No.: 10120561
AS/400 card	Item-No.: 10120528

Logistic Data

Giftbox Language	EN
Manual Language	EN
Dimension/Pallet	720 x 428 x 970 mm
Weight/Pallet	98 kg
Pieces/Carton	1
Pieces/Pallet	1
Item Number	10120161
EAN-Code	4260074975574
Warranty	24 Month (except battery)
IEC Norm	62040-2 Category C3, 62040-1-1,

Version: EN 11/02/2013

We reserve the right for technical changes and mistakes

Use UPS configurator on www.powerwalker.com for
detailed backup time information.