


PowerWalker AS/400 Card 2

AS/400 Card

Provides contact closure for monitoring UPS

Offer different dry-contacts

Suitable for IBM server, Personal PC and workstations equipment's, auto-controlled industrial equipment and communication applications.

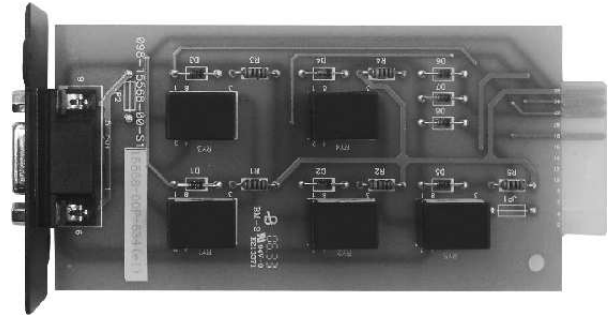

Item-No. 10120527

The PowerWalker AS/400 card 2 provides contact closures for remote monitoring of your UPS. It offers clean dry-contact signal (active close) for application requirement.


Product Features

For more details download see manual on our website

Supports following models:

VI 1500R/3000R


VI 1000RT/1500RT/2000RT/3000RT LCD



Front view

Dry Contact Signal Pin Definition

Pin Assignment	Function Description	I/O
Pin 1	UPS Failure	O/P
Pin 2	UPS Audible Alarm	O/P
Pin 5	Common for Relays	I/P
Pin 7	Battery Low	O/P
Pin 8	UPS ON	O/P
Pin 9	Utility Failure	O/P

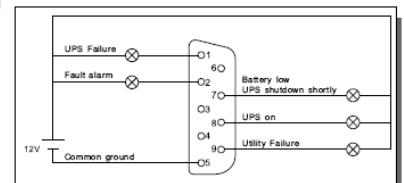

Technical Details

Power Specifications

DC Input Voltage	Max. 24V
DC Current	Max. 1.0A
Suitable Application	IBM Server, Personal PC & Workstations equipment, Auto-controlled industrial equipment & communication applications
Communication Port	DB-9

Product Details

Dimensions	130 x 61 x 1.6 mm
Colour	Black
Weight	50g
Model Code	AS-400 card 2

Environment

Temperature	0°C – 40°C
Humidity	0 - 95% RH (non- condensing)

Logistic Data

Item Number	10120527
EAN Code	4260074974560
Warranty	24 Months

Version: EN 02/05/2012

We reserve the right for technical changes and mistakes