PowerWalker SNMP Manager

SNMP Module

Item-No. 10120505

- Monitor UPS through RJ45 network connection
- RJ45 10/100BaseT port
- Protocol support SNMP-V1, SNMP-V2
- Supported MIB: RFC1213, RFC1628, MIB
- Optional: Environmental Monitor Detector

PowerWalker SNMP manager with advanced ViewPower Pro software becomes an enhanced communication solution for UPS monitoring and controls. This SNMP manager card allows remote monitor and manage multiple UPSs from anywhere with internet access. ViewPower Pro software will leverage internet capability of SNMP manager to remotely program or shut down UPSs. Equipped with SNMP manager and installed with Viewpower Pro software, power conditions of all UPSs can be monitored anytime/anywhere even though the UPS units are located in different floors. Besides, this card also come equipped with easy-to-update firmware feature. Whenever the updated firmware is released, system manager can download it and simply upgrade all with one click.

Front view

Top view

Product Features

- Allows to control and monitoring of multiple UPSs through RJ45 network connection
- Real-time dynamic graphs of UPS data (voltage, frequency, load level, battery level)
- Warning notifications via audible alarm, broadcast, mobile messenger, e-mail and SNMP traps
- Historic data log stored in centralized PC database
- Simple firmware upgrade with one click
- Password security protection and remote access management
- Optional: Environmental Monitoring Detector for temperature and humidity (smoke alarm is optional for EMD)

Supports following models:

VFI 1000/1500/2000/3000/6000/10000 LCD
VFI 1000R/1500R/2000R/3000R/6000R/10000R LCD

PowerWalker is a brand of:
BlueWalker GmbH
Martin-Buber-Strasse 12 • D-41470 Neuss • Germany
Phone: +49 (0) 2137 / 92 98 73 • Fax: +49 (0) 2137 / 78 73 925
info@bluewalker.eu • www.bluewalker.eu • www.powerwalker.com

Technical Details

Product Features

CPU	MCF52254AF80
System Clock	48.0M
Flash memory	512K
LED	2
Watch Dog	YES
SNMP Protocol	V1 and V2
Supported MIB	RFC1213, RFC1628, MIB

LAN Interface

Type	10M/100M UTP
Ethernet Throughput	808 Kb/sec
Latency	0.89 milliseconds

Power Specifications

DC Input Voltage	12V
DC Input Current	120mA

Software & System Requirements

Software	ViewPower Pro
Operating System	Windows family, Linux, Mac, Solaris
Other	1x RJ45 port

Product Details

Dimensions	23 x 47 x 15 mm
Colour	Black
Weight	34.7g
Model Code	SNMP Manager

Environment

Temperature	0°C – 40°C
Humidity	0 - 95% RH (non- condensing)

Package Content

Package Content	SNMP Manager, manual

Optional

EMD	Article-Nr. 10120544

Logistic Data

Giftbox Language	EN
Manual Language	EN
Item Number	10120505
EAN	4260074974034
Warranty	24 Months

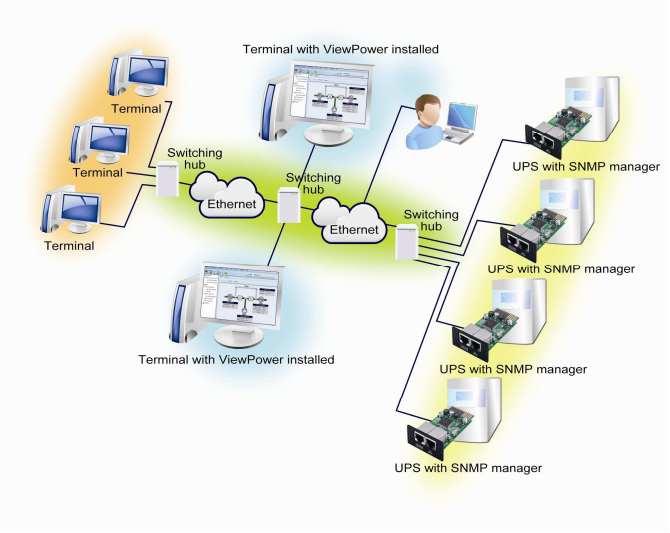

Version: EN 03/05/2012
We reserve the right for technical changes and mistakes